

SIT505

Photo Interrupter

The SIT505 is a photointerrupter high-performance standard type, combines high-output GaAs IRED with high sensitive phototransistor.

Features


- PCB direct mount type
- GAP:5mm
- RoHS Compliance

Applications

- Printers
- FAX
- Copiers
- Scanners
- Amusement machines

Dimensions

(Unit: mm)

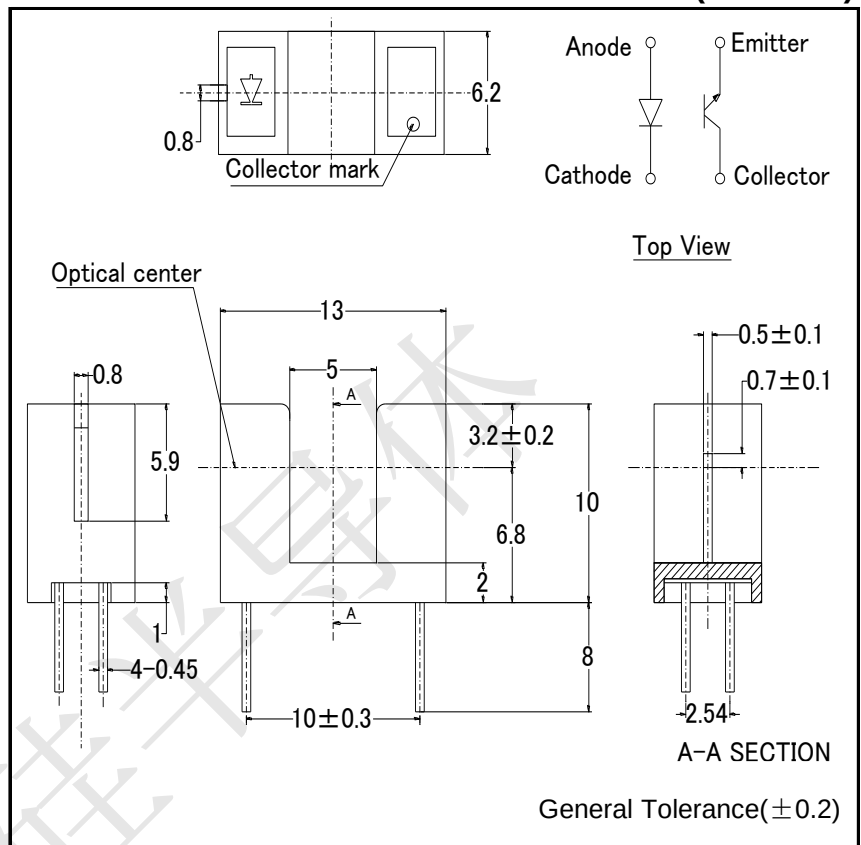

MAXIMUM RATINGS

(Ta=25°C)

Item		Symbol	Ratings	Unit
Input	Power dissipation	P_D	100	mW
	Forward current	I_F	60	mA
	Reverse voltage	V_R	5	V
Output	Collector power dissipation	P_C	100	mW
	Collector current	I_C	40	mA
	Emitter-Collector voltage	V_{ECO}	5	V
Operating temperature		$T_{opr.}$	-20~+85	°C
Storage temperature		$T_{stg.}$	-30~+85	°C







* 1 The soldering should be 1mm away from bottom of the holder. t=within 3s

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

Electro-Optical Characteristics

(Ta=25°C)



Item		Symbol	Conditions	Min	Typ	Max	Unit
Input	Forward voltage	V_F	$I_F=20\text{mA}$	-	1.2	1.4	V
	Reverse current	I_R	$V_R=5\text{V}$	-	-	10	μA
	Peak wavelength	λ_p	$I_F=20\text{mA}$	-	940	-	nm
Output	Dark current	I_{CEO}	$V_{CE}=10\text{V}, E_V=0\text{lx}$	-	1	100	nA
Trans mission	Light current	I_C	$I_F=20\text{mA}, V_{CE}=5\text{V}, \text{Non-shading}$	0.5	-	10	mA
	Leak current	I_{CEOD}	$I_F=20\text{mA}, V_{CE}=5\text{V}, \text{Shading}$	-	0.5	10	μA
	C-E saturation voltage	$V_{CE}(\text{sat})$	$I_F=20\text{mA}, I_C=0.1\text{mA}$	-	0.15	0.4	V
	Rise time	tr	$I_C=2\text{mA}, V_{CC}=5\text{V}, R_L=100\Omega$	-	4	-	μs
	Fall time	tf		-	5	-	μs

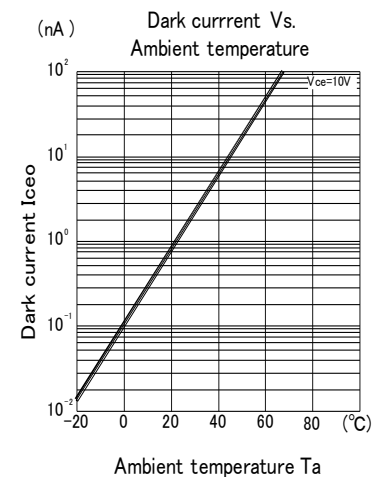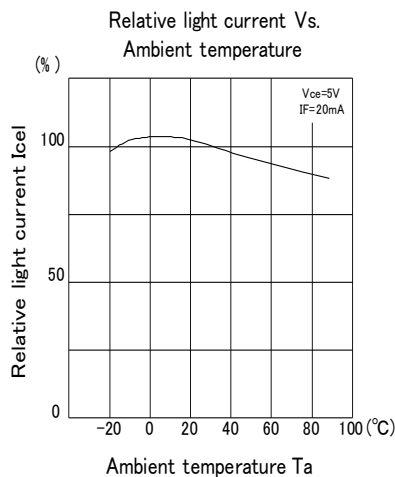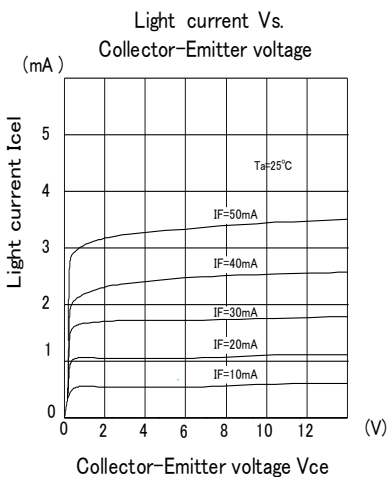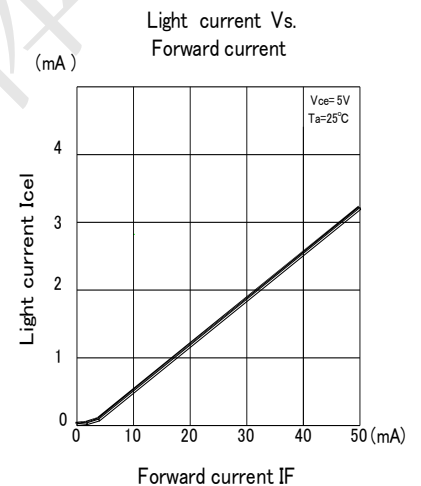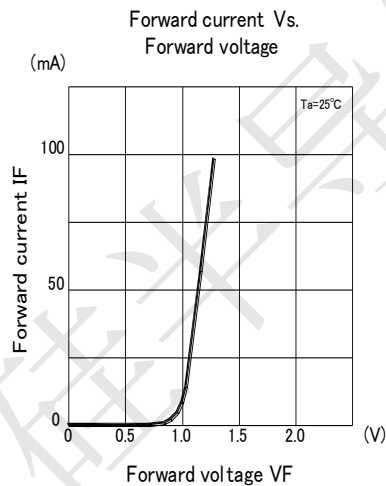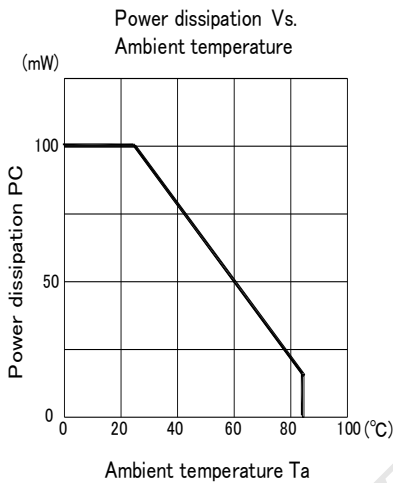


The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

Photo Interrupter


SIT505

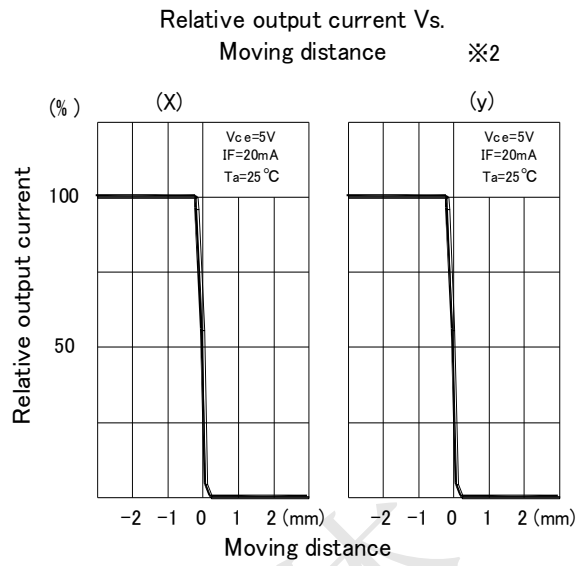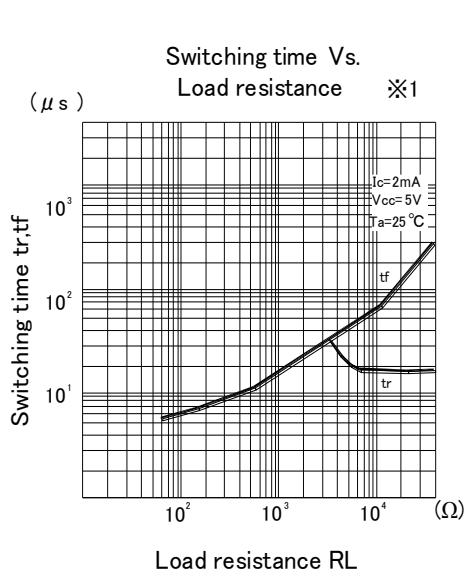

*1 Switching time measurement circuit

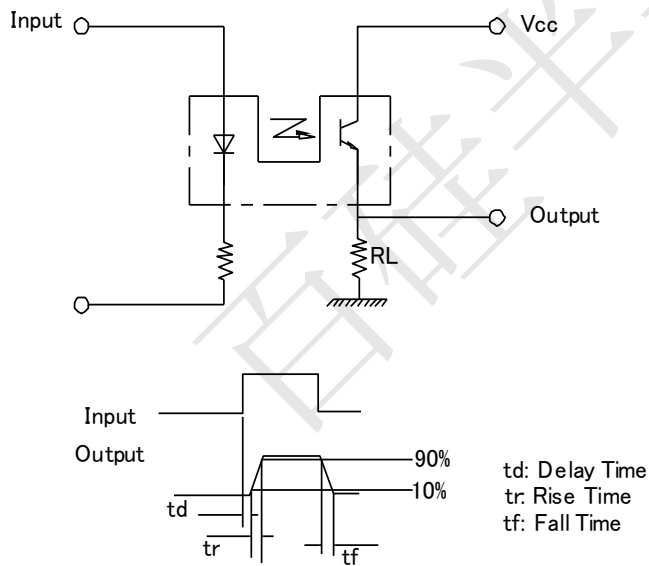

*2 Method of measuring position detection characteristic

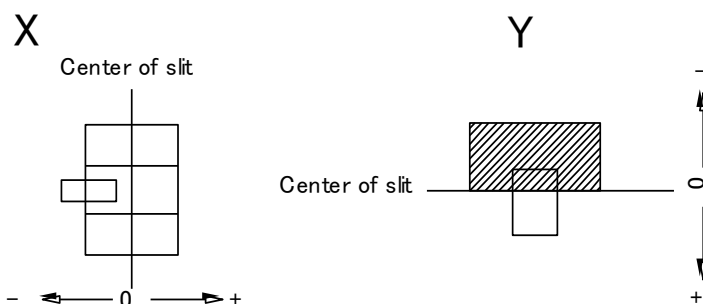

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

Packing Specification

- 1.Fixed quantity (max 1000pcs) of the products are packed into plastic bag
- 2.Six bags of the products are put into #2 box
- 3.Two #2 boxes are put into #3 box(max 12000pcs)
- 4.Packing slip is pasted on #3 box

